




L2+ Managed Ethernet Switches

FR-5M4648• FR-5M4648P

L2+ Managed 48-port 10/100/1000Base-TX (Non-PoE/PoE+) + 6-port 1000M/10GBase-SFP Ethernet Switch with AC Power Input, 1U Rack-mount

Product Data Sheet

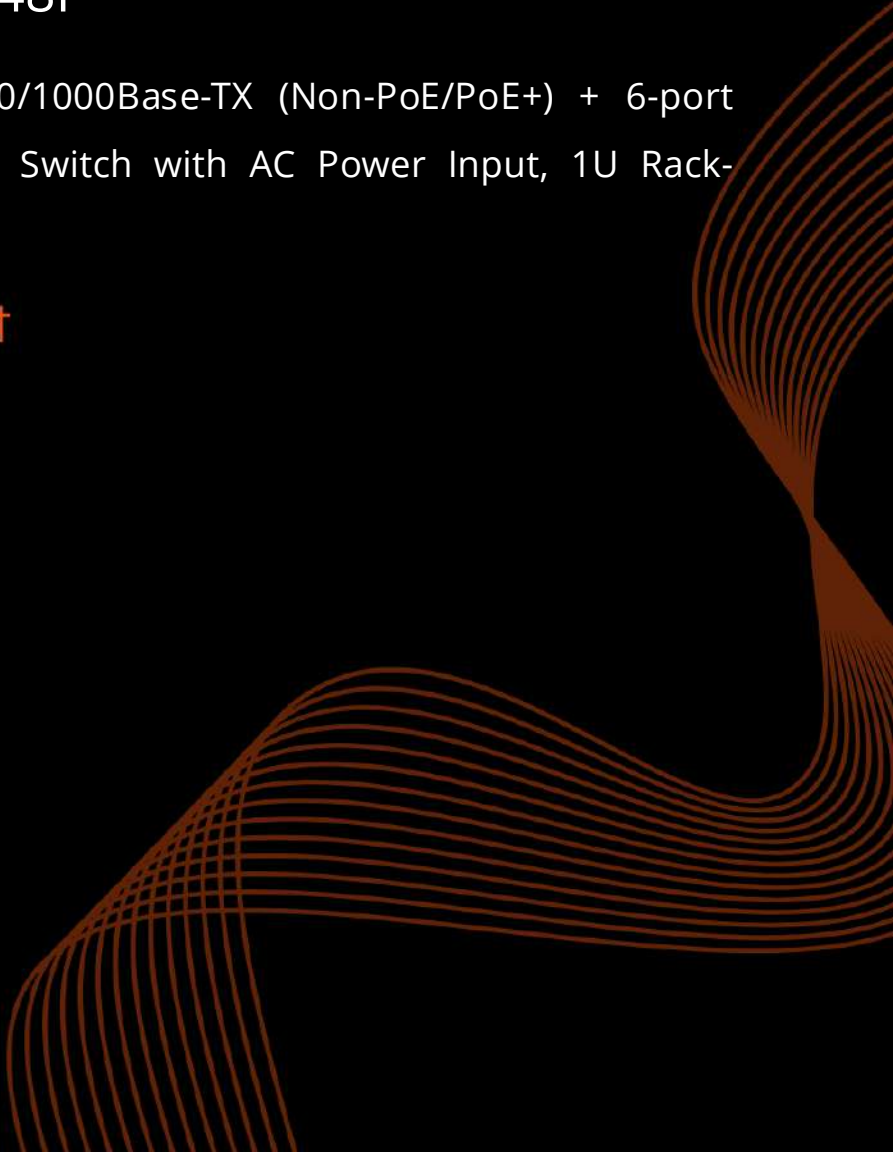

FR-5M4648• FR-5M4648P



Main Features

- 48x10/100/1000BASE-T RJ45 with 6x10G SFP+ Slots
- Optionally Up to 48 ports of IEEE802.3af/802.3at devices powered
- IEEE 802.1Q tagged VLAN, Provider Bridging(VLAN Q-in-Q) support IEEE 802.1ad
- Supports Spanning Tree Protocol, STP/RSTP/MSTP
- Storm control support broadcast/Unknown unicast/Unknown multicast
- Supports priority retagging and complicated flow classification based on VLAN, MAC, source address, destination address, IP or priority to better streamline carrier's services.
- Security Authentication Mechanism: IEEE 802.1x, Radius and Tacacs+ Enhanced Service Security Mechanism
- Supports management modes such as the console port, Telnet, SSH, etc. Supports the WEB management mode, which is easy and efficient so that it makes installation and debugging convenient.

Overview

Introducing the FR-5M4648 series 48-Port Managed Gigabit Ethernet Switch – the scalable backbone for demanding enterprise and IoT networks. This high-density switch delivers robust performance with 48 auto-negotiating 10/100/1000 Mbps ports, ensuring seamless, high-speed connectivity. Optionally support IEEE 802.3af/at PoE/PoE+ standards (with up to 800W total budget), enabling flexible power delivery to devices like IP cameras, wireless APs, and VoIP phones without extra cabling. Equipped with comprehensive Layer 2/3 management features including VLANs, QoS, ACLs, and IGMP snooping, it provides precise control, enhanced security, and optimized traffic prioritization. Ideal for high-density deployments in smart buildings, campuses, and data centers, the FR-5M4648 combines power, intelligence, and future-ready scalability in a single platform.

Hardware Specifications

Product	FR-5M4648	FR-5M4648P
Copper Ports	48x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (Port 1-48)	
Fiber Ports	6x1/10G SFP+ Slots(Port 49-54)	
Console	1x RJ45-to-RS232 Serial Port(115200)	
RAM	512Mbyte	
FLASH	16MByte	
Reset Button	<5 sec: System Reboot; > 10 sec: Factory Default	
Surge Protection	± 6kV DC, ±4kV RJ45	± 6kV DC, ±6kV RJ45
Enclosure	IP30 Metal	
Installation	19inch Rack Mount or Desktop	
Dimension	440mm*250mm*45mm	

Switching

Switch Architecture	Store-and-Forward
Switch Fabric	216Gbps/non-blocking
Forwarding Rate	160.7Mpps(64-byte packet size)
Packet Buffer Size	16 Mbits
Maximum Packet Length	12K bytes
MAC Address Table	32K entries, automatic source address learning and aging
Flow Control	IEEE 802.3x pause frame for full duplex, Back pressure for half duplex

Power Supply & Power over Ethernet

Power Input	1	
Input Voltage	AC 100-240V, 50/60Hz 0.15A	
Power Consumption	40 Watts Max (without PoE Load), 850 Watts Max (with PoE Load)	
PoE Ports	\	Port 1 to 48 IEEE802.3 af/at
PoE Power Supply Type	\	End-span
Power Supply Pin	\	1/2(+), 3/6(-)
Max Power Per Port	\	30W
PoE Power Budget	\	800W (Default)

Environmental

Operating Temperature	0 °C to 50 °C
Storage Temperature	-20°C to 70°C
Operating Humidity	5%~90% (non-condensing)
MTBF	113,368 hours (Non-PoE Models) 108,182 hours (PoE Models) @MIL-HDBK-217F GB
Heat Dissipation	205 BTU/h (non-PoE mode) 3139 BTU/h (with Max PoE load)
Cooling	2xCooling Fans
Noise Level	74 dBA (PoE Models)


Software Features		
Management Interface	CLI(Console/Telnet(RFC854)), WebGUI(HTTPS), Tenet	
Management	DHCP Server/Client, DHCP Option82, Port Mirror, RMON(1,2,3,9groups), SNMPv1/v2c/v3/SNMP Trap/Inform, Syslog, CPU Monitoring, Cable Diagnostics	
File Management	Firmware Upgrade/Backup, Dual Images, Configuration Download/Backup, Multiple Configuration, TFTP(RFC783), HTTP	
Layer 2 Features	Link Aggregation *static link aggregation *802.3ad LACP *Up to 64 aggregation groups, containing 8 ports per group Spanning Tree Protocol *802.1D STP *802.1w RSTP *802.1s MSTP *32 MSTP Instance *STP Security: Loop back detection, TC Protect, BPDU Filter/Protect, Root Protect	Loopback Detection Flow Control *802.3x Flow Control Port Mirroring *One-to-One *Many-to-One *Flow-Based *Tx/Rx/Both LLDP, LLDP-MED
L2 Multicast	1024 IGMP groups IGMP Snooping *IGMP v1/v2/v3 Snooping *IGMP Fast Leave *MVR *IGMP Snooping Querier *Limited IP Multicast *Static Multicast Forwarding	MLD Snooping *MLD v1/v2 Snooping *MLD Snooping Querier *Fast Leave *Limited IP Multicast *Static Multicast Forwarding
VLAN	VLAN Group *4K VLAN Groups 802.1Q tag VLAN MAC VLAN Protocol VLAN	VLAN VPN (QinQ) GVRP Private VLAN
QoS	Class of Service *Port Priority *802.1p CoS/DSCP priority *8 Priority Queues *Queue Schedule Mode Bandwidth Control *Port/Flow based Rating Limiting *Storm Control	-Diffserv *Diffserv Class *Diffserv Policy *Diffserv Service -Auto-VoIP -Voice VLAN

Software Features		
ACL	Supports up to 3328 entries MAC ACL *Source MAC *Destination MAC *VLAN ID *User Priority *EtherType Standard IP ACL *Source IP *Destination IP -Time based ACL	Extended IP ACL *Source IP *Destination IP *Fragment *IP Protocol *TCP Flag *TCP/UDP Port *DSCP/IP TOS
Security	AAA, Radius and Tacacs+ DHCP Snooping IP-MAC-Port Binding: Up to 32768 entries ARP Inspection: Up to 32768 entries IP Source Guard: Up to 1020 entries Static/Dynamic Port Security Up to 64 MAC addresses per port Broadcast/Multicast/Unicast Storm Contr *kbps/ratio/pps control mode IP/Port/MAC based access control DoS Defend	802.1X *Port based authentication *MAC(Host) based authentication *Guest VLAN *Support Radius authentication and accountability Port Isolation MAC Filtering Secure web management through HTTPS with SSLv3/TLS1.0 SSHv1/SSHv2
MIBs	MIB II (RFC1213) Interface MIB (RFC2233) Ethernet Interface MIB (RFC1643) Bridge MIB (RFC1493) P/Q-Bridge MIB (RFC2674) RMON MIB (RFC2819)	RMON2 MIB (RFC2021) Radius Accounting Client MIB (RFC2620) Radius Authentication Client MIB (RFC2618) Remote Ping, Traceroute MIB (RFC2925)

LED	State	Description
PWR (P1&P2)	ON	Power is being supplied
	OFF	Power is not being Supplied.
Sys	Blinking	The system is running well
	OFF	The system is running unwell
Link/ACT (1-54)	ON	Port connection is active
	Blinking	Data transmitted
	OFF	Port connection is not active.
RJ45 Port Speed	ON	1000M is running
	OFF	No 1000M is running

Regulatory & Warranty	
ISO	Manufactured in ISO-9001 facility
Safety	IEC62368-1:2020+A11:2020
EMI	FCC Part 15B Class A, IEC 61000-3-2
EMS	IEC61000-4-2 ESD: Contact:±8kV, Air:±15kV IEC61000-4-5 Surge: Power: ±6kV; RJ45:±4kV/±6kV(PoE)
Environmental	RoHS 2011/65/EU Annex II(EU)
Warranty	1 Year, Details See: https://fiberroad.com/warranty

Dimensions Unit: mm

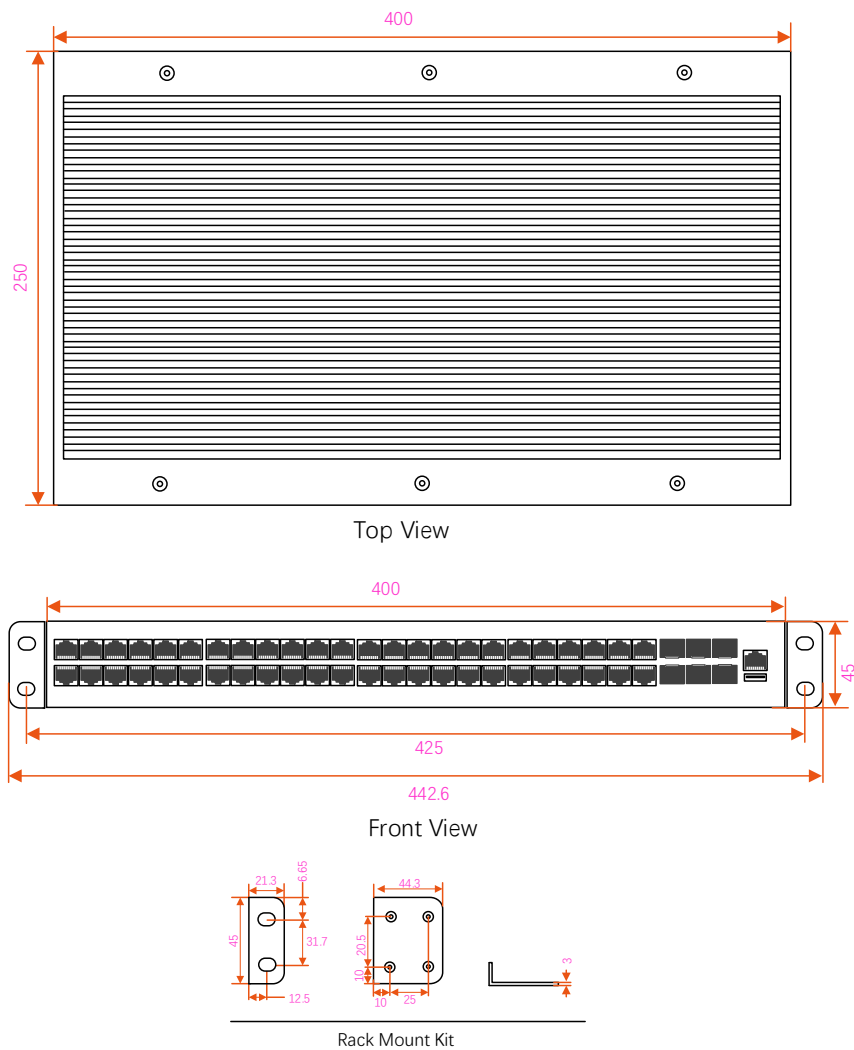

Ordering Information

Available Model	Description	Input Voltage	Operating Temp.
FR-5M4648	L2+ Managed 48-port 10/100/1000Base-TX + 6-port 1000M/10GBase-SFP Ethernet Switch with AC Power Input, 1U Rack-mount	AC100-240V	0 to +50°C
FR-5M4648P	L2+ Managed 48-port 10/100/1000Base-TX (PoE+) + 6-port 1000M/10GBase-SFP Ethernet Switch with AC Power Input, 1U Rack-mount	AC100-240V	0 to +50°C

Optional Accessories (to be purchased separately)

SFP Optical Transceiver

(S)=SFP Option

Please select your SFP on our SFP Modules page for details.

Precautions

To prevent equipment damage or personal injury caused by improper operation, please observe the following precautions:

- ❖ Turn off the power before installation. Wear an anti-static wrist strap and ensure proper skin contact to prevent electrostatic discharge (ESD) damage.
- ❖ Ensure the power supply voltage matches the voltage specified on the switch.
- ❖ Before powering on the switch, verify that the power circuit is not overloaded to avoid abnormal operation or equipment damage.
- ❖ Do not open the chassis while the switch is operating. To avoid the risk of electric shock, do not disassemble the device.
- ❖ Disconnect the power before cleaning. Do not use a wet cloth or liquid cleaners.
- ❖ When installing in a rack, mount equipment from bottom to top to prevent overloading.
- ❖ Do not place heavy objects on the switch.