



L2+ Managed Ethernet Switches

FR-9M3424 • FR-9M3424P • FR-9M3424BT

Industrial L2+ Managed 24-port 10/100/1000Base-TX (Non-PoE/PoE+/PoE++)  
+ 4-port 10/100/1000Base-TX or 100/1000Base-SFP Combo Ethernet Switch  
with Redundant DC Power Inputs, 1U Rack-mount

Product Data Sheet



# FR-9M3424 • FR-9M3424P • FR-9M3424BT

## Main Features



- 24x10/100/1000BASE-T Gigabit Ethernet RJ45
- 4x100/1000BASE-X SFP or 10/100/1000BASE-T Combo Ports
- Optionally support IEEE 802.3 af/at/bt Power Over Ethernet Standard
- Full gigabit L2+ management, easy to manage the network by CLI/WebGUI/NMS.
- Build up a redundant industrial network with STP/RSTP/MSTP/ERPSv2
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- Traffic Classification Based on IEEE 802.1p, COS, WRR, and Strict Mode
- SNMPv1/v2c/v3 for different levels of network management
- Wide operating temperature range -40 to 75°C (-40 to 167°F)
- All-aluminum Case, Compact and Fanless Design

## Overview

Experience unparalleled performance with the Layer 2+ Plus Managed Industrial Ethernet Switch, designed specifically for demanding industrial environments. Engineered for exceptional stability and reliability, this switch ensures seamless Ethernet transmission in factories, outdoor settings, and harsh conditions. Its robust construction withstands the rigors of industrial applications while delivering advanced management features that facilitate optimal network control. Elevate your operational efficiency and safeguard your critical data communications with a solution that has consistently proven its mettle across various sectors. Invest in enduring quality—choose the Layer 2+ Plus Managed Industrial Ethernet Switch for your networking needs.

Engineered for reliability in the most demanding industrial environments, the Layer 2+ Plus Managed Industrial Ethernet Switch seamlessly integrates dual power input design to ensure uninterrupted connectivity. Enclosed in a rugged IP40-rated housing that can be easily mounted on DIN rails or walls, it excels in harsh settings where durability and uptime are critical. With its exceptional operating temperature range of -40 to 75°C, this switch is built to withstand extreme conditions.

**Hardware Specifications**

| Product          | FR-9M3424                                                                         | FR-9M3424P         | FR-9M3424BT |
|------------------|-----------------------------------------------------------------------------------|--------------------|-------------|
| Copper Ports     | 24x10/100/1000BASE-T RJ45 Auto-MDI/MDI-X (Port 1-24)                              |                    |             |
| Fiber Ports      | 4x100/1000BASE-X SFP Slots or 10/100/1000BASE-T Combo Ports (Port 25-28)          |                    |             |
| Console          | 1x RJ45-to-RS232 Serial Port(115200)                                              |                    |             |
| Connector        | 1 removable 5-contact terminal blocks<br>Pin 1/2 for Power 1, Pin 4/5 for Power 2 |                    |             |
| RAM              | 128Mbyte                                                                          |                    |             |
| FLASH            | 32MByte                                                                           |                    |             |
| Reset Button     | <5 sec: System Reboot; >10 sec: Factory Default                                   |                    |             |
| Surge Protection | ±6kV DC, ±4kV RJ45                                                                | ±6kV DC, ±6kV RJ45 |             |
| Enclosure        | IP40 aluminum case                                                                |                    |             |
| Installation     | Rack Mount                                                                        |                    |             |
| Dimension        | 400x300x44mm                                                                      |                    |             |
| Weight           | 2600g(Bare weight), 3500g(With package)                                           |                    |             |

**Switching**

|                       |                                                                        |  |  |
|-----------------------|------------------------------------------------------------------------|--|--|
| Switch Architecture   | Store-and-Forward                                                      |  |  |
| Switch Fabric         | 56Gbps/non-blocking                                                    |  |  |
| Forwarding Rate       | 41.66Mpps(64-byte packet size)                                         |  |  |
| Packet Buffer Size    | 4 Mbits                                                                |  |  |
| Maximum Packet Length | 10K bytes                                                              |  |  |
| MAC Address Table     | 8K entries, automatic source address learning and aging                |  |  |
| Flow Control          | IEEE 802.3x pause frame for full duplex, Back pressure for half duplex |  |  |

**PoE & Power Supply**

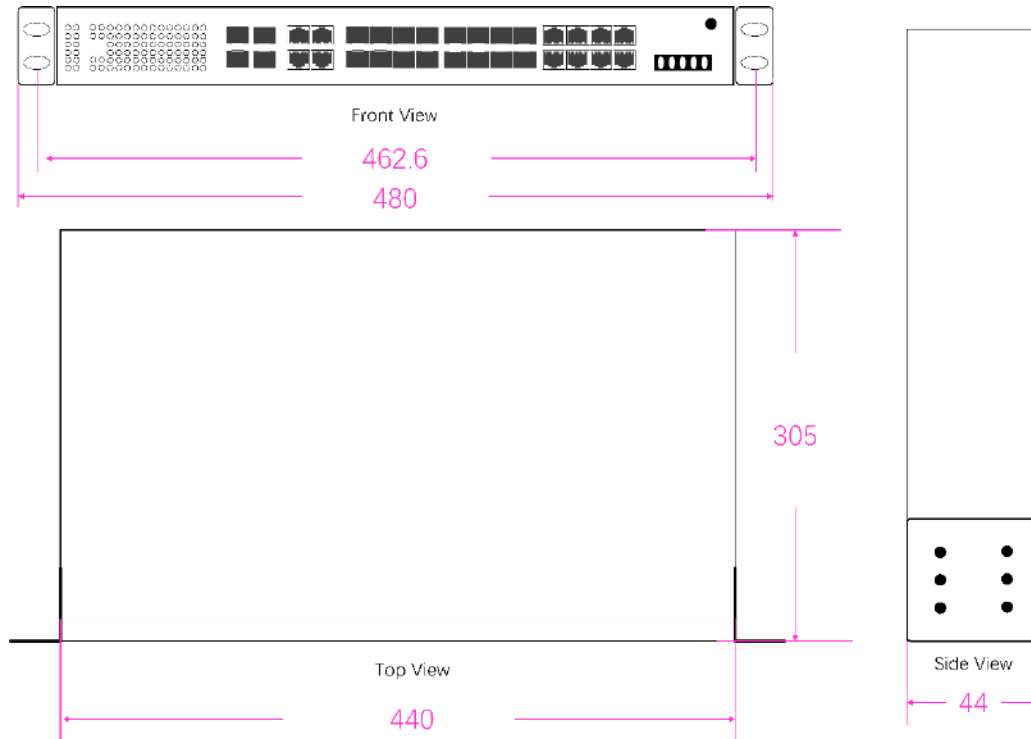
|                       |                                 |                              |                                  |
|-----------------------|---------------------------------|------------------------------|----------------------------------|
| PoE Ports             | \                               | Port 1 to 24 IEEE802.3 af/at | Port 1 to 24 IEEE802.3af/at/bt   |
| PoE Power Supply Type | \                               | End-span                     | End-span                         |
| Power Supply Pin      | \                               | 1/2(+), 3/6(-)               | 1/2(+), 3/6(-) or 4/5(+), 7/8(-) |
| Max Power Per Port    | \                               | 30W                          | 90W                              |
| Input Voltage         | DC9-56V                         | DC48-56V                     | DC52-56V                         |
| Power Consumption     | 15 Watts Max (without PoE load) |                              |                                  |
| PoE Power Budget      | \                               | Max 585W@dual 52VDC inputs   |                                  |

**Environmental**

|                       |                                                         |  |  |
|-----------------------|---------------------------------------------------------|--|--|
| Operating Temperature | -40°C~75°C (-40 to 167 °F)                              |  |  |
| Storage Temperature   | -40°C~85°C (-40 to 185 °F)                              |  |  |
| Operating Humidity    | 5%~95% (non-condensing)                                 |  |  |
| MTBF                  | 907,476 hours @ Telcordia SR-332 Standard               |  |  |
| Heat Dissipation      | 65 BTU/h (non-PoE mode),1054 BTU/h (with 240W PoE load) |  |  |
| Cooling               | Passive Cooling, Fanless Design                         |  |  |
| Noise Level           | 0 dBA                                                   |  |  |

| Software Features        |                                                                                                                                                                                                                                                              |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Port Configuration       | Port(Admin Status) disable/enable<br>Copper Port: Auto-negotiation 10/100/1000Mbps full and half duplex mode selection<br>Fiber Port: 100M/1000M speed selection<br>Flow Control disable/enable<br>Power saving(EEE) disable/enable<br>Each port description |
| Port Status              | Display each ports' speed duplex mode, link status, flow control status, auto negotiation status, Fiber Port Information, Port Traffic                                                                                                                       |
| Port Mirroring           | Source Ingress/ Egress Port/ Both, Many-to-1 monitor                                                                                                                                                                                                         |
| VLAN                     | Up to 4K VLAN groups, out of 4094 VLAN IDs<br>IEEE 802.1Q tag-based VLAN<br>IEEE 802.1AD Q-in-Q tunneling(Double VLAN)<br>GVRP(Generic VLAN Registration Protocol)                                                                                           |
| Link Aggregation         | IEEE 802.3ad LACP/Static trunk<br>Supports 6 trunk groups with 4 ports per trunk                                                                                                                                                                             |
| Spanning Tree Protocol   | IEEE 802.1D Spanning Tree Protocol<br>IEEE 802.1w Rapid Spanning Tree Protocol<br>IEEE 802.1s Multiple Spanning Tree Protocol                                                                                                                                |
| Multicast                | Dynamic/Static Multicast groups<br>IGMP Snooping v1,2,3<br>Port-based IGMP Snooping Fast Leave<br>GMP Querier                                                                                                                                                |
| Rate Limitation          | Per Port Rate Limitation<br>Ingress: 16-1000000 kbps/Egress: 16-1000000 kbps                                                                                                                                                                                 |
| Ring                     | ITU-T G.8032 ERPS, Recovery time < 10ms                                                                                                                                                                                                                      |
| QoS                      | Traffic classification based, strict priority and WRR<br>8-level priority for switching<br>-Port number<br>-802.1p priority<br>-802.1Q VLAN tag<br>-DSCP/TOS field in IP Packet                                                                              |
| ACL                      | IP-based ACL/MAC-based ACL<br>ACL based on:<br>-MAC Address<br>-IP Address<br>-Ethertype<br>-Protocol Type<br>-VLAN ID<br>-DSCP<br>-802.1p Priority                                                                                                          |
| Security                 | Port Security<br>Static MAC address<br>IEEE 802.1x port-based network access control<br>RADIUS authentication<br>DHCP Snooping, DHCP option 82                                                                                                               |
| PoE Management Functions |                                                                                                                                                                                                                                                              |
| PoE System Management    | PoE Port status monitoring<br>Total PoE power budget control<br>PoE usage threshold and temperature threshold<br>PoE port Priority<br>PoE mode(PoE/PoE+/PoE++)<br>PD reboot(Zero Traffic Duration)                                                           |
| PoE Schedule             | Absolute/Periodic Mode                                                                                                                                                                                                                                       |

| Software Features           |                                                                                                                                                                                                                            |                                             |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| Layer 3 Functions           |                                                                                                                                                                                                                            |                                             |
| IP Interfaces               | Max. 8 VLAN interfaces                                                                                                                                                                                                     |                                             |
| Routing Table               | Max.32 routing entries                                                                                                                                                                                                     |                                             |
| Routing                     | IPv4 software static routing                                                                                                                                                                                               |                                             |
| Management                  |                                                                                                                                                                                                                            |                                             |
| Basic Management Interface  | Console; Telnet; Web browser; SNMPv1/v2c                                                                                                                                                                                   |                                             |
| Secure Management Interface | SSHv2, TLSv1.2, SNMPv3,SNMP MIB                                                                                                                                                                                            |                                             |
| System Management           | Firmware Upgrade by HTTP protocol through Ethernet network<br>Configuration upload/download through HTTP<br>Remote syslog, System log<br>LLDP protocol, SNTp<br>PREVIEW NMS<br>Alarm(Relay, Led, Temperature, Trap, Power) |                                             |
| LED                         | State                                                                                                                                                                                                                      | Description                                 |
| PWR<br>(P1&P2)              | ON                                                                                                                                                                                                                         | Power is being supplied                     |
|                             | OFF                                                                                                                                                                                                                        | Power is not being Supplied.                |
| RUN                         | Blinking                                                                                                                                                                                                                   | The system is running well                  |
|                             | OFF                                                                                                                                                                                                                        | The system is running unwell                |
| FAIL(Only For PoE)          | ON                                                                                                                                                                                                                         | PoE Status is abnormal                      |
|                             | OFF                                                                                                                                                                                                                        | PoE Status is normal                        |
| MAX(Only For PoE)           | ON                                                                                                                                                                                                                         | Total PoE Power out of maximum power budget |
|                             | OFF                                                                                                                                                                                                                        | Total PoE Power under maximum power budget  |
| R.O.                        | ON                                                                                                                                                                                                                         | Ring Owner                                  |
|                             | OFF                                                                                                                                                                                                                        | Not Ring Owner                              |
| RING                        | ON                                                                                                                                                                                                                         | Ring is enabled                             |
|                             | OFF                                                                                                                                                                                                                        | Ring is disabled                            |
| Link/ACT<br>(1-28)          | ON                                                                                                                                                                                                                         | Port connection is active                   |
|                             | Blinking                                                                                                                                                                                                                   | Data transmitted                            |
|                             | OFF                                                                                                                                                                                                                        | Port connection is not active.              |
| RJ45 Port Speed             | ON                                                                                                                                                                                                                         | 1000M is running                            |
|                             | OFF                                                                                                                                                                                                                        | No 1000M is running                         |
| ALM                         | ON                                                                                                                                                                                                                         | Has alarm information                       |
|                             | OFF                                                                                                                                                                                                                        | No alarm information                        |
| Regulatory & Warranty       |                                                                                                                                                                                                                            |                                             |
| ISO                         | Manufactured in ISO-9001 facility                                                                                                                                                                                          |                                             |
| Safety                      | IEC62368-1:2020+A11:2020                                                                                                                                                                                                   |                                             |
| EMI                         | FCC Part 15B Class A, IEC 61000-3-2                                                                                                                                                                                        |                                             |
| EMS                         | IEC61000-4-2 ESD: Contact:±8kV, Air:±15kV<br>IEC61000-4-5 Surge: Power: ±6kV; RJ45:±4kV/±6kV(PoE)                                                                                                                          |                                             |
| Shock                       | IEC 60068-2-27                                                                                                                                                                                                             |                                             |
| Free Fall                   | IEC 60068-2-32                                                                                                                                                                                                             |                                             |
| Vibration                   | IEC 60068-2-6                                                                                                                                                                                                              |                                             |
| Environmental               | RoHS 2011/65/EU Annex II(EU)                                                                                                                                                                                               |                                             |
| Warranty                    | 5 Years, Details See: <a href="https://fiberroad.com/warranty">https://fiberroad.com/warranty</a>                                                                                                                          |                                             |
| Package Contents            |                                                                                                                                                                                                                            |                                             |
| Device                      | 1 x Industrial Ethernet Switch                                                                                                                                                                                             |                                             |
| Cable                       | 1 x DB9 female to RJ45                                                                                                                                                                                                     |                                             |
| Installation Kit            | 2 x Rack-mounting Kits                                                                                                                                                                                                     |                                             |
| Documentation               | 1 x Quick installation guide<br>1 x Warranty card                                                                                                                                                                          |                                             |

**Dimensions      Unit: mm****Ordering Information**

| Available Model | Description                                                                                                                                                                   | Input Voltage | Operating Temp. |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------------|
| FR-9M3424       | Industrial L2+ Managed 24-port 10/100/1000Base-TX + 4-port 10/100/1000Base-TX or 100/1000Base-SFP Combo Ethernet Switch with Redundant DC Power Inputs, 1U Rack-mount         | Dual DC9-56V  | -40 to +75°C    |
| FR-9M3424P      | Industrial L2+ Managed 24-port 10/100/1000Base-TX (PoE+) + 4-port 10/100/1000Base-TX or 100/1000Base-SFP Combo Ethernet Switch with Redundant DC Power Inputs, 1U Rack-mount  | Dual DC9-56V  | -40 to +75°C    |
| FR-9M3424BT     | Industrial L2+ Managed 24-port 10/100/1000Base-TX (PoE++) + 4-port 10/100/1000Base-TX or 100/1000Base-SFP Combo Ethernet Switch with Redundant DC Power Inputs, 1U Rack-mount | Dual DC9-56V  | -40 to +75°C    |

**Optional Accessories (to be purchased separately)****Power Supply**

|              |                                                                                                                            |
|--------------|----------------------------------------------------------------------------------------------------------------------------|
| FR-I-60-24   | DIN-rail 24 VDC power supply with 60W/0.6A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature      |
| FR-I-120-48  | DIN-rail 48-58V VDC power supply with 120W/1.2A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature |
| FR-I-240W-48 | DIN-rail 48-55V VDC power supply with 240W/2A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |
| FR-I-480W-48 | DIN-rail 48-55V VDC power supply with 480W/4A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature   |

**SFP Optical Transceiver**

(S)=SFP Option

Please select your SFP on our SFP Modules page for details.

**Armored Fiber Patch Cable / LAN Cable**

FRPC-A-LC

Armored LSZH LC UPC to LC UPC Duplex OS2 single mode 7.0mm for Outdoor Application , 1-50m

FRLC-A-CAT6

Armored Cat6 Snagless shielded(S/FTP) Ethernet Network Patch Cable, 26AWG, 1000Base-T, 0.5m – 3m

**Shipping**

| Model No.                    | FR-9M3424       |  | FR-9M3424P/FR-9M3424BT |  |
|------------------------------|-----------------|--|------------------------|--|
| Classification Codes         | HS Code: 851762 |  |                        |  |
|                              | HTS: 8517.62.00 |  |                        |  |
| NDA Compliant                | Yes             |  |                        |  |
| Individual Gross Weight      | 3.5kg           |  | 3.98kg                 |  |
| Individual Package Dimension | 495x393x80mm    |  |                        |  |
| Package Quantity             | 4 Units         |  |                        |  |
| Package Gross Weight         | 15kg            |  | 17kg                   |  |
| Package Dimension            | 520x345x418mm   |  |                        |  |

**Precautions**

To prevent equipment damage or personal injury caused by improper operation, please observe the following precautions:

- ❖ Turn off the power before installation. Wear an anti-static wrist strap and ensure proper skin contact to prevent electrostatic discharge (ESD) damage.
- ❖ Ensure the power supply voltage matches the voltage specified on the switch.
- ❖ Before powering on the switch, verify that the power circuit is not overloaded to avoid abnormal operation or equipment damage.
- ❖ Do not open the chassis while the switch is operating. To avoid the risk of electric shock, do not disassemble the device.
- ❖ Disconnect the power before cleaning. Do not use a wet cloth or liquid cleaners.
- ❖ When installing in a rack, mount equipment from bottom to top to prevent overloading.
- ❖ Do not place heavy objects on the switch.

Specifications are subject to change without notice. Fiberroad Technology Co., Ltd. makes no warranties, either expressed or implied, regarding the information contained herein. Please contact us for the latest product information.